


HF SERIES



HYDRAULIC HOT PRESS MACHINE

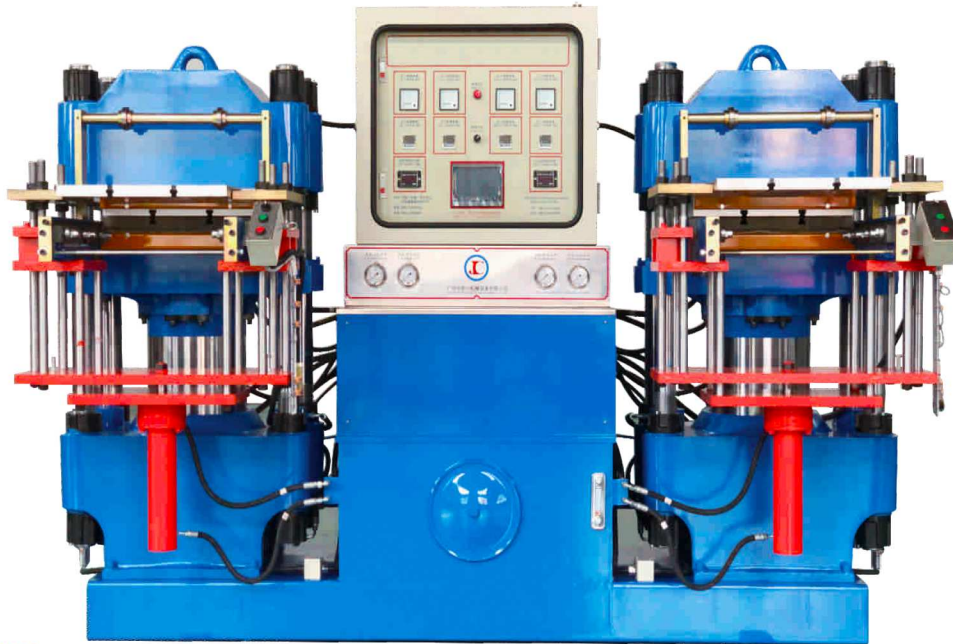

Machine Features

1. Adaptable with different demolding methods like 2RT/3RT/4RT.
2. Accurate mold-in and mold-out position to ensure no damage to the molding.
3. Dual motor design for safe and independent working of the twin station.

Application Products



Main Technical Parameters

Model	100HF	160HF	200HF	250HF	300HF	400HF	500HF	1200HF
Clamp force (Ton)	100	160	200	250	300	400	500	1200
Platen size (mm)	400x460	500x520	550x560	650x600	700x800	850x850	1000x1000	1600x2200
Plunger stroke (mm)	200	250	250	250	300	300	350	350
Heating plates distance (mm)	200-300	250-350	250-350	250-350	300-400	300-400	350-450	350-550
Tie bar distance (mm)	490x230	590x270	650x320	745x310	785x380	940x450	1105x475	Six tie bars
Mold opening type	2RT-3RT-4RT Track Suspension							
Max. Operating pressure (MPa)	20	20	20	20	20	20	20	20
Motor power (HP)	7.5x2(5.5KWx2)	10x2(7.5KWx2)	10x2(7.5KWx2)	10x2(7.5KWx2)	10x2(7.5KWx2)	10x2(7.5KWx2)	10x2(7.5KWx2)	25(18.5KW)
Heating power (KW)	7.2x2	11.7x2	13.5x2	15.3x2	24x2	26.4x2	36	126
Total power (KW)	25.4	38.4	42	45.6	63	74.8	47	144.5
Gross weight (Ton)	5	6	7.8	11	15	17	13.5	28.5
Machine size (LxWxH) (mm)	2500x2080x1950	2800x2260x1900	2930x2350x2050	3190x2780x2230	3360x2970x2250	3660x3050x2350	1460x3600x2380	2350x5400x2950

All technical parameters are subject to change without prior notice.

TRUE TECH MACHINERY CO.,LTD.

Add: 288 Bangkhunthian-Chaithalay Rd. Samaedam Bangkhunthian Bangkok 10150 Thailand.
Tel: 02-892-1588 Fax: 02-892-0044 Email: Marketing@truetechmachinery.co.th



www.truetechmachinery.co.th